


HCM1806

Product code: HCM1806

Manufacturer: JL World

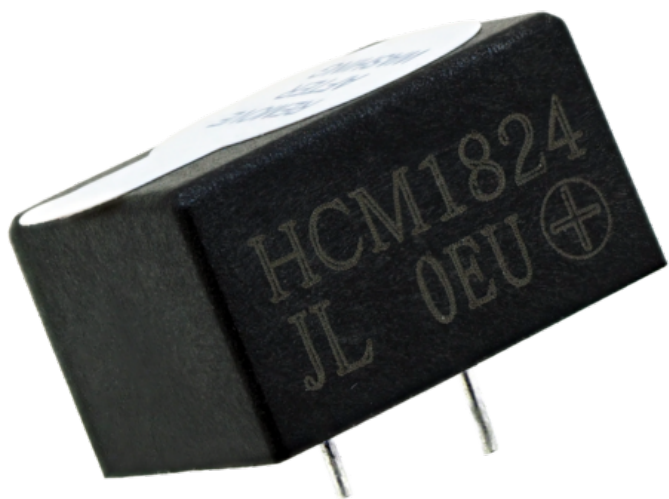

HCM1806 is a JL World electromagnetic buzzer, PIN mounting type.

Features:

Dimensions: 18x14x11 mm

Rated Voltage: 6 V

Operating Voltage: 3 ~ 10 V

Rated Frequency: 2048 Hz

Rated Current: ≤ 50 mA

SPL (sound pressure level) at 10cm: ≥ 85 dB

Coil Resistance (Ω)	60 ± 9
Rated Current (mA)	≤ 50
Rated Frequency (Hz)	2048
SPL at 10 cm (dB)	≥ 85
Technology	Electro-Magnetic
Operating temperature	$-30 \sim +70$
Operating Voltage (V)	3~10
Typology	Pin